
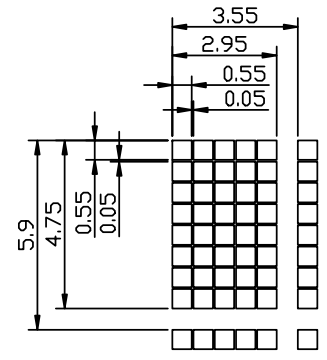
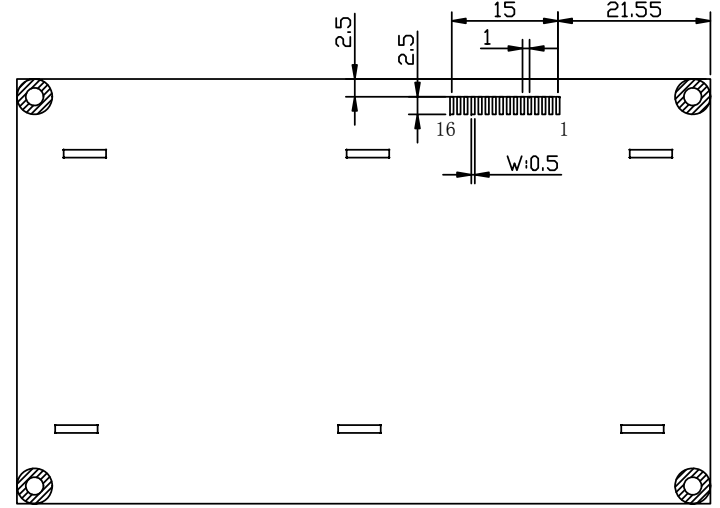
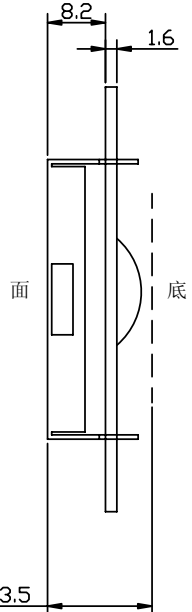


PIN NO	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A/Vee
16	K

REV	DESCRIPTION:	DATE
A00	First issue	2007/5/12

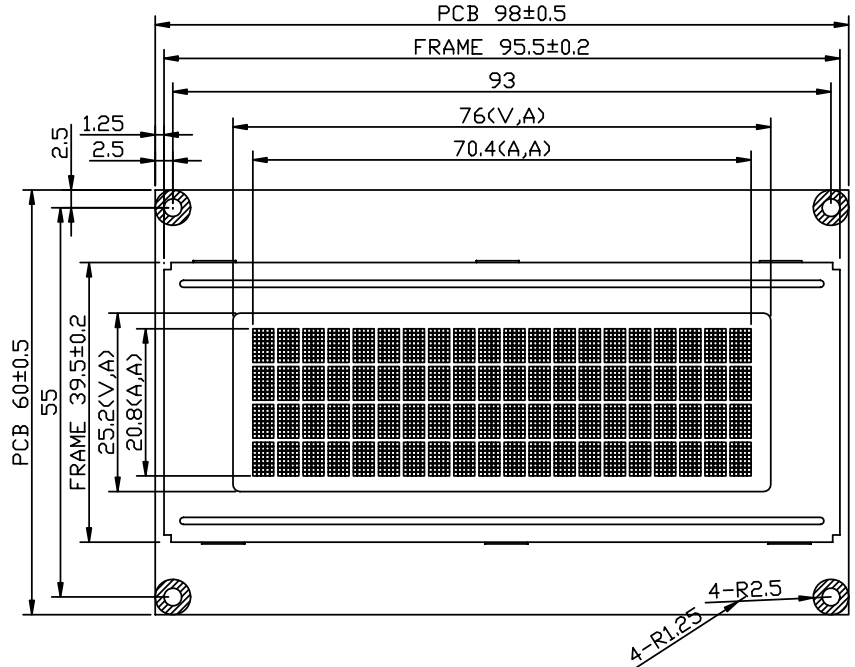

**NOTES:**

1. DRIVE METHOD: 1/16DUTY, 1/5BIAS,VOP4.8V, VDD5.0V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN(Y-G), TRANSFLECTIVE/POSITIVE.
4. OPERATING TEMP: -10 TO 60°C.
5. STORAGE TEMP: -20 TO 70°C.
6. CONNECTION:COB
7. BACK LIGHT:YWLLow-GREEN.
8. IC:SPLC780D,SPLC100A.
9. NOT DIMENSION TOLERANCES IS ±0.2.

DESCRIPTION: C/D 外型图				
SCALE: FIT	<b>深圳市瑞祥微电子有限公司</b>			
SHEET: 1 OF 1				
GENERAL TOL: UNIT ± 0.20mm mm				
APPROVALS	DATE	MODEL NUMBER : RXC2004A00		PART NO:
APP:				
CHK:		DO NOT SCALE THIS DRAWING		
DWN: ZY.CHEN				