


1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
 2. VIEWING ANGLE: 6:00 O'CLOCK.
 3. VIEWING MODE: POSITIVE/REFLECTIVE
 4. DISPLAY TYPE : 7W
 5. CONNECTOR: PIN
 6. FLUID SPECIFICATION:
- DRIVING VOLTAGE: 3.0V
MULTIPLEX LEVEL: STATIC
OPERATING TEMP. : -20°C --- $+70^{\circ}\text{C}$
STORAGE TEMP. : -30°C --- $+80^{\circ}\text{C}$

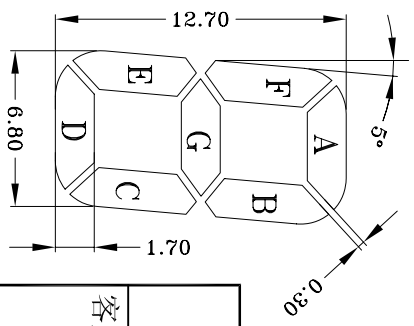

厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.

客户确认:

绘图: 董焯
审核: 吴云霞

单位: mm


绘图编号: GYTN2219
客户编号:



日期: 2005.10.29

批准: yan

图纸版号: 01

页数: 1/3



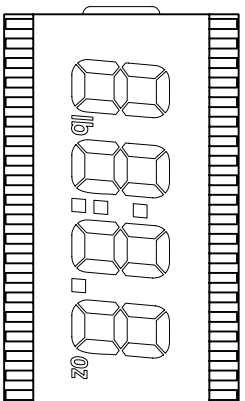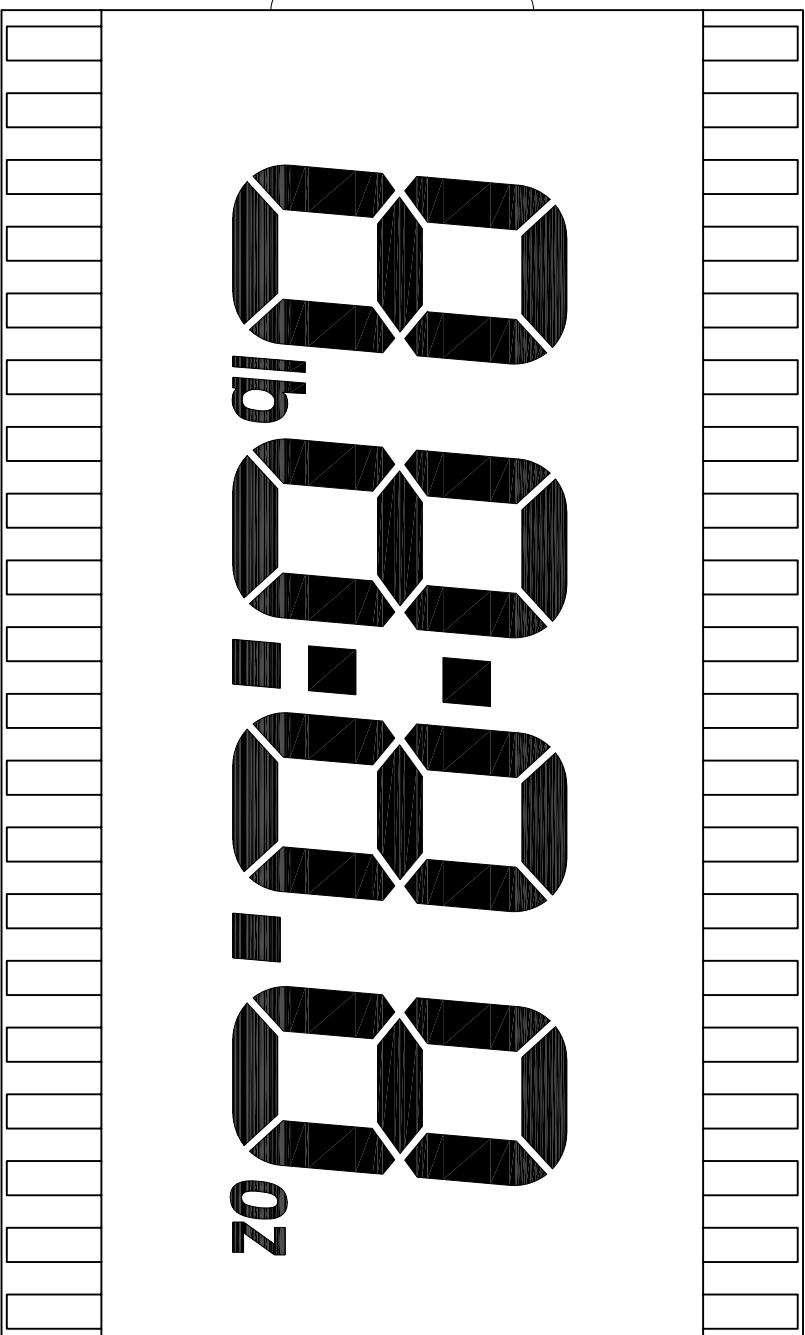

1:1



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 董炯

绘图编号: GYTN2219

单位: mm

审核: 吴云霞


客户编号:

日期: 2005.10.29


批准: Yan

图纸版号: 01

页数: 3/3

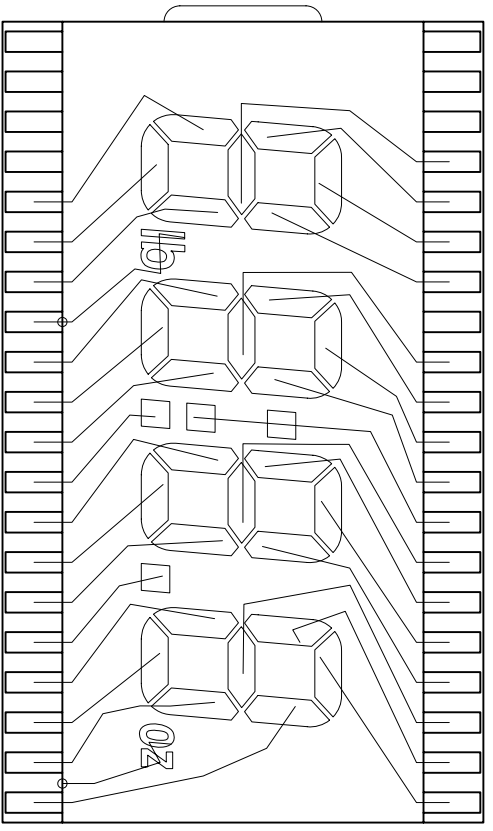


SEG

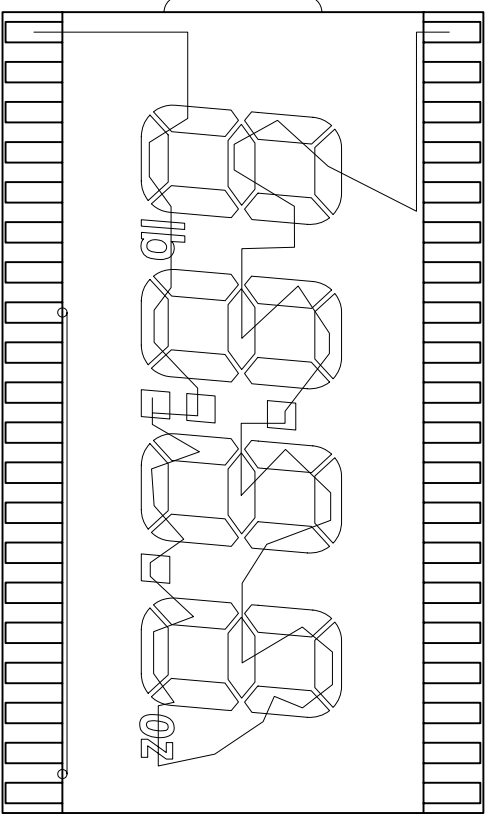

COM

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM				1E	1D	1C	1B	2E	2D	2C	2DP	3E	3D	3C	3DP	4E	4D	4C	4B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	4A	4F	4G	3B	3A	3F	3G	COL	2B	2A	2F	2G		1B	1A	1F	1G			COM

 **厦门精显电子有限公司**
 XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 董炯
 审核: 吴云霞

单位: mm

绘图编号: GYTN2219
 客户编号:

日期: 2005.10.29

批准: Yan

图纸版号: 01

页数: 2/3