


Data Sheet

SL18 47003

Mechanical Specifications (mm)

	D:	19.0	± max
	T:	7.5	± max
	Lead Diameter	1.0	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	9.50	± nom
	C:	5.50	± nom

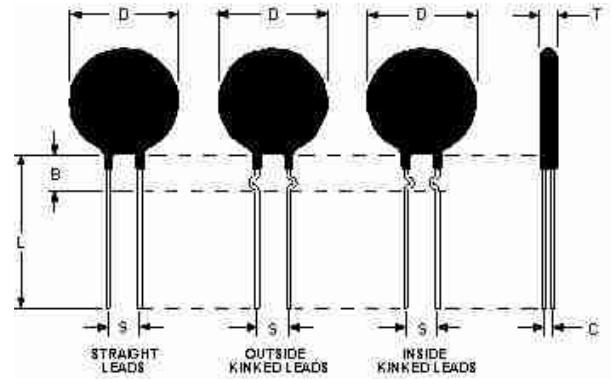

Electrical Specifications

	Resistance:	47.0 Ω	± 25 %
	Max Steady State Current upto 65°C:	3.00	A
	Max Rec. Energy Rating:	75	J
	Actual Failure Instantaneous Energy:	150	J
	Maximum Capacitance @ 120 VAC:	5,209	μ f
	Maximum Capacitance @ 240 VAC:	1,302	μ f
	Resistance @ 100% Max Current:	0.00	Ω
	Resistance @ 50% Max Current:	1.20	Ω
	Body Temperature at 100% Max Current:	180.00	°c
	Dissipation Constant:	25.0	mw/°c
	Thermal Time Constant:	100	Sec.
	Material Type (for Beta and Curve):	M	

SL18 47003	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

